LiuGong

YZH5310GJBHW

Concrete Truck Mixer

Chassis Model	SINOTRUK ZZ1317N3268C
Emission Regulation	CHINA III
Engine Rated Power	247 kW (336 hp)
Drum loading capacity	12 m^3
Drum remnant ratio of discharging	⩽0.5%
Hydraulic pump	Sauer SPV2/089
Hydraulic motor	Sauer TMM089B
Speed reducer	Sauer TMG71.2

YZH5310GJBHW
Concrete Truck Mixer

CHASSIS

Chassis Model	ZZ1317N3267C
Emission Stage	CHINA III
Engine Power	247 kW (336 hp)
Engine Displacement	9.8 L
Driving Type	8×4
Wheelbase	1,800 + 3,200 + 1,350 mm
Max. Travel Speed	90 km/h
Min. Turning Radius	23 m
Brake type	Redundant air brakes
Truck loading capacity	14,870 kg

DRUM

Drum material	Baosteel B520JJ
Drum volume	18.9 m^3
Drum loading capacity	12 m^3
Drum agitating volume	6.6 m^3
Material charge speed	≥3 m^3/min
Material discharge speed	≥2.7 m^3/min
Material discharge control	manual
Drum remnant ratio of discharging	≤0.5
Drum rotating speed	0-14 rpm
Drum tilt angle	11°

HYDRAULIC SYSTEM

Hydraulic pump	Sauer SPV2/089
Hydraulic pump type	piston pump
Hydraulic motor	Sauer TMM089B
Speed reducer	Sauer TMG71.2
Hydraulic circuit type	closed circuit cycle
Hydraulic tank capacity	20 L
Water tank capacity	450 L
Water supply type	air pressure

DIMENSIONS&WEIGHT

Overall Length	10,200 mm
Overall Width	2,496 mm
Overall Height	3,970 mm
Truck gross Weight	31,000 kg
Truck net weight	16,000 kg

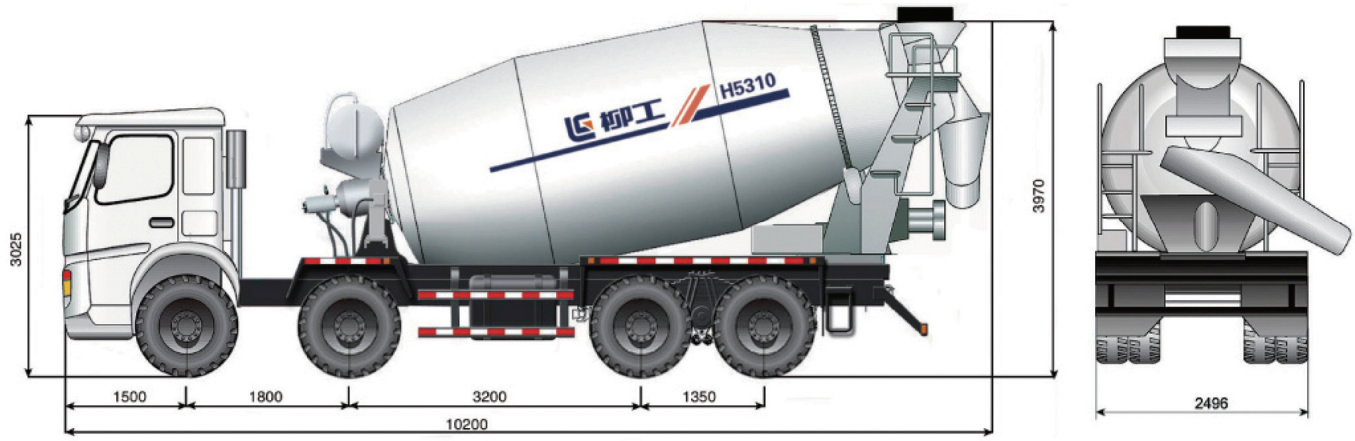

Guangxi Liugong Machinery Co., Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 388 6124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.